

Proposed Detached Dual Occupancy Lot 514, 49 Suttor Avenue Caerleon NSW 2850

0444-A01	TITLE SHEET & BASIX COMMITMENTS
0444-A02	LOCATION, SITE, SUBDIVISION & LANDSCAPE PLAN
0444-A03	FLOOR PLAN - DWELLING ONE
0444-A04	FLOOR PLAN - DWELLING TWO
0444-A05	ELEVATIONS - DWELLING ONE
0444-A06	ELEVATIONS - DWELLING TWO
0444-A07	SECTION & GENERAL NOTES
0444-A08	ELECTRICAL & MECHANICAL PLANS - DWELLING ONE
0444-A09	ELECTRICAL & MECHANICAL PLANS - DWELLING TWO

# BASIX COMMITMENTS - Dwelling One & Two

# THERMAL COMFORT

> See Typical Section, Floor Plan and Basix Certificate for further Thermal Comfort Commitments. > The proposed construction must have the following applied to the floors, walls and ceiling / roof of the dwelling.

CONSTRUCTION	ADDITIONAL INSULATION REQUIRED	OTHER
Floor - concrete slab on ground	Nil	
External wall - brick veneer/framed & cladded	R2.06/R2.2 (or R2.60 including construction)	
Internal wall shared with Garage - plasterboard	Nil	
Ceiling and roof - flat ceiling / pitched roof	Ceiling: R4.0 (up), Roof: foil / sarking	Unventilated; Dark (solar absorptance >0.70)

# ENERGY

LINEROT	
HOT WATER	ARTIFICIAL
> A Gas Instantaneous Hot Water System must be installed with 4.5 star rating	> The pr -
COOLING & HEATING SYSTEM: Day/night zoned	-
> Living Area - 1-phase air conditioning, 3.5 Star (cold zone)	_
> Bedroom - I-phase air conditioning, 3.5 Star (cold zone)	_
VENTILATION EXHAUST SYSTEMS:	OTHER:
> At least   Bathroom - individual fan not ducted - manual on/off	> Each r
> Kitchen - individual fan, not ducted - manual on/off	
> Laundry - natural ventilation only.	> A fixed
NATURAL LIGHTING:	

> A window and / or skylight must be installed in 2 bathrooms / toilet(s) of the development

# GLAZING REQUIREMENTS

WINDOWS & GLAZED DOORS

> The applicant must install all proposed windows, glazed doors and shading devices as listed below.

WINDOW/DOOR NO.	ORIENTATION			SHADING (mm)	TYPE
Living	NE	2.0x2.4	0	E-3.6, A/H-0.15	Aluminium, single, clear
Dining	NE	1.8x2.4	0	E-0.6, A/H-0.0	Aluminium, single, clear
Bath, WC	SE	0.9x1.5, 0.9x0.6	0	E-0.6, A/H-0.0	Aluminium, single, clear
Laundry	SE	2.0x1.5	0	E-0.6, A/H-0.15	Aluminium, single, clear
Lounge	SW	2.1x1.8	0	E-3.6, A/H-0.15	Aluminium, single, clear
Dining, Bed3, Bed2, ENS, Bed1	NW	.8x .8,  .2x .5 (x2), 0.6x .5,  .5x .8	0	E-0.6, A/H-0.0	Aluminium, single, clear

> Note: E = Eave | A/H = Above Head | S/O = Solid Overhang | A/B = Above Base

# WATER

### FIXTURES

- > Showerheads 4 Star (>4.5 <=6L/min)
- > Toilet Flushing System 4 Star Rating
- > Bathroom Basın Taps 4 Star Ratıng

## LANDSCAPING

> Kitchen Taps - 4 Star Rating

> Minimum of 3m2 of low water use species used in the development

## BASIX NOTES:

I | THE APPLICANT MUST COMPLY WITH THE BASIX COMMITMENTS WITHIN BASIX CERTIFICATE PROVIDED DURING THE CONSTRUCTION OF THIS PROPOSED DEVELOPMENT.

HIS DRAWING IS SUBJECT TO COPYRIGHT & MUST NOT BE REPRODUCED OR USED FOR MEANS OTHER THAN INTENDED WITHOUT THE WRITTEN PERMISSION OF THE AUTHOR - LYNCH BUILDING GROUP

REV	DATE	DESCRIPTION	NOTE
А	28/06/2021	QUOTING PLANS	ALL D
В	23/05/2022	FINAL PLANS FOR PCA SUBMISSION	- ALL - SEP - STR





LYNCH BUILDING GROUP CLIENT: PROPOSED DETACHED DUAL OCCUPANCY LOT 514 SUTTOR AVENUE CAERLEON NSW 2850

ROIFCT





AL LIGHTING:

primary type of lighting in the following rooms must be fluorescent or LED: At least 3 of the bedrooms / study (dedicated)

- At least 3 of the living / dining rooms (dedicated)
- The kitchen (dedicated) - All hallways (dedicated)
- The laundry (dedicated)

refrigerator space must be constructed so that it is well ventilated ed outdoor clothes drying line must be installed

RAINWATER TANK


- > A rainwater tank of at least 2,000L capacity must be installed
- > The rainwater tank must collect rainwater from at least 150m2 of the roof area > The rainwater tank must be connected to:
- The cold water tap that supplies each clothes washer, and at least
- one outdoor tap in the development

### TITLE SHEET & BASIX COMMITMENTS DRAWING TITLE: FILE NO: 0444-A01 DESIGN: LBG 01 OF 09 B

DRAFTED: J.LYNCH CHECKED:

A.LYNCH PAPER SIZE: A3

DRAWING NO:

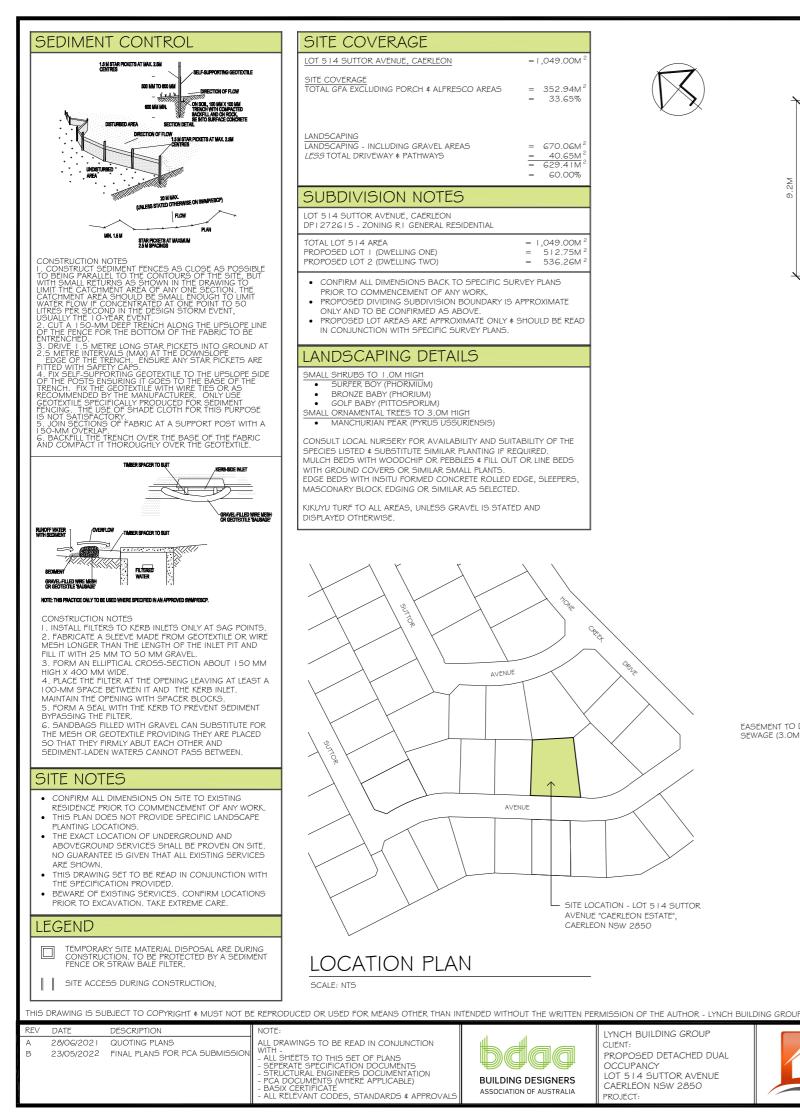



R.


AVENUE "CAERLEON ESTATE",

CAERLEON NSW 2850

CLIENT

ROJECT



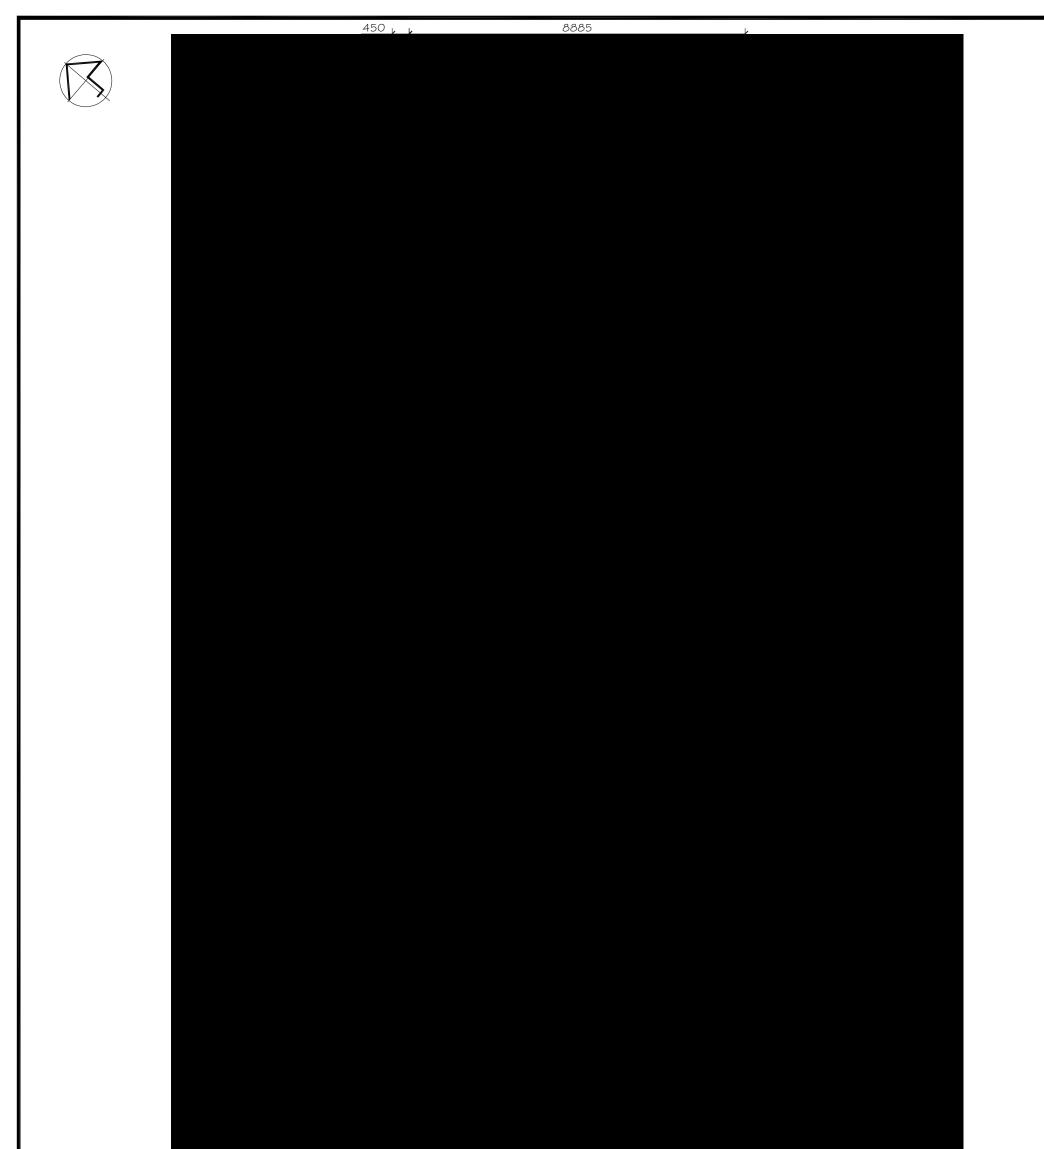


# FLOOR PLAN

SCALE: 1:100

FLOOR AREAS		NOTES
DWELLING ONE - LIVING - GARAGE	$= 152.17 \text{ M}^2$ $= 24.30 \text{ M}^2$	<ul> <li>PORCH &amp; ALFRESCO POST POSITION(S)</li> <li>MAY VARY THROUGH ENGINEERS DESIGNS &amp; DURING CONSTRUCTION.</li> </ul>
TOTAL	$= 176.47 \text{ M}^2$	MH = MAN HOLE LOCATION
- PORCH - ALFRESCO	$= 1.60 \text{ M}^2$ $= 11.40 \text{ M}^2$	ALL OPENINGS ARE SHOWN WITH WIDTH DISPLAYED
TOTAL DWELLING ONE	= 189.47 M <sup>2</sup>	THAN 2.2M FROM F.F.L. UNLESS STATED OTHERWIS

THIS DRAWING IS SUBJECT TO COPYRIGHT & MUST NOT BE REPRODUCED OR USED FOR MEANS OTHER THAN INTENDED WITHOUT THE WRITTEN PERMISSION OF THE AUTHOR - LYNCH BUILDING GROUP

DESCRIPTION 21 QUOTING PLANS 22 FINAL PLANS FOR PCA SUBMISSION	NOTE: ALL DRAWINGS TO BE READ IN CONJUNCTION WITH - - ALL SHEFTS TO THIS SET OF PLANS	bdaa	LYNCH BUILDING GROUP CLIENT: PROPOSED DETACHED DUAL	, LYNCH BUILDING	POSTAL: PO BOX 1298 Mudgee NSW 2850 CONTACT US:	FL DRAWING TITLE	OOR PLAN - DV	VELLING ONE	
	- SEPERATE SPECIFICATION DOCUMENTS - STRUCTURAL ENGINEERS DOCUMENTATION - PCA DOCUMENTS (WHERE APPLICABLE) - BASIX CERTIFICATE - ALL RELEVANT CODES, STANDARDS & APPROVALS	BUILDING DESIGNERS	OCCUPANCY LOT 5 I 4 SUTTOR AVENUE CAERLEON NSW 2850 PROJECT:		P. 0411 761 934 E. projects@lynchbuildinggroup.com.au www.lynchbuildinggroup.com.au	DESIGN: LE DRAFTED: J. CHECKED: A.	G FILE NO: 0444-A0 YNCH PAPER SIZE: A3	03 OF 09	B REV:

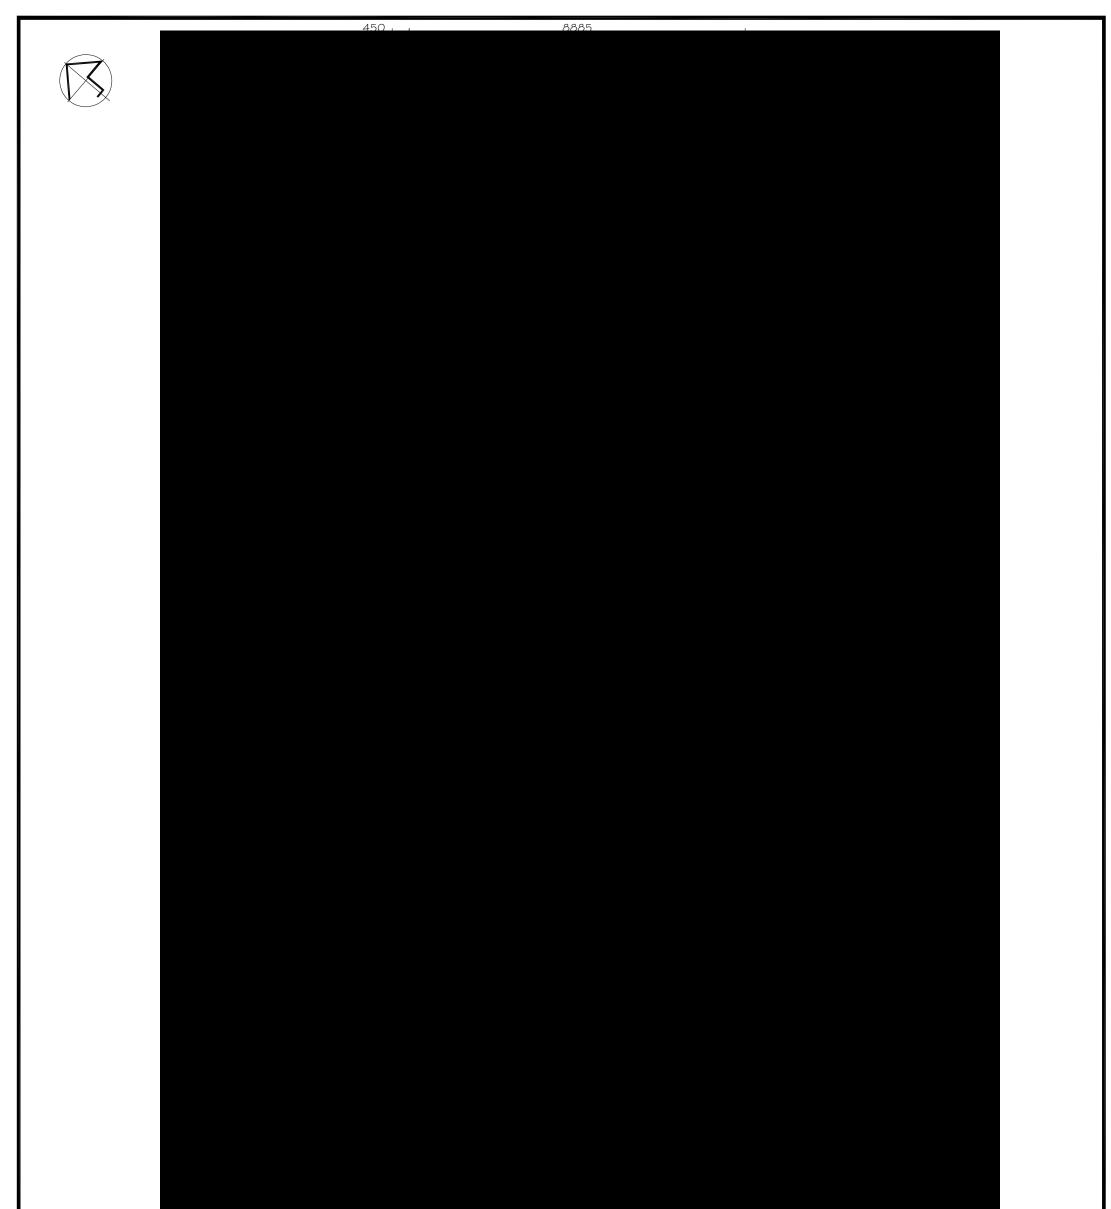

# FLOOR PLAN - DWELLING TWO


SCALE: 1:100


FLOOR AREAS		NOTES
DWELLING TWO - LIVING - GARAGE	$= 152.17 \text{ M}^2$ = 24.30 M <sup>2</sup>	<ul> <li>PORCH &amp; ALFRESCO POST POSITION(S)</li> <li>MAY VARY THROUGH ENGINEERS DESIGNS &amp; DURING CONSTRUCTION.</li> </ul>
TOTAL	= 176.47 M <sup>2</sup>	MH = MAN HOLE LOCATION
- PORCH - ALFRESCO	$= 1.60 \text{ M}^2$ $= 11.40 \text{ M}^2$	ALL OPENINGS ARE SHOWN WITH WIDTH DISPLAYED
TOTAL DWELLING TWO	= 189.47 M <sup>2</sup>	THAN 2.2M FROM F.F.L. UNLESS STATED OTHERWISE

THIS DRAWING IS SUBJECT TO COPYRIGHT & MUST NOT BE REPRODUCED OR USED FOR MEANS OTHER THAN INTENDED WITHOUT THE WRITTEN PERMISSION OF THE AUTHOR - LYNCH BUILDING GROUP


- E	EV DATE	DESCRIPTION	NOTE:	a a	LYNCH BUILDING GROUP			POSTAL:	FL			
		QUOTING PLANS FINAL PLANS FOR PCA SUBMISSION	ALL DRAWINGS TO BE READ IN CONJUNCTION WITH - - ALL SHEFTS TO THIS SET OF PLANS	Baaa	CLIENT: PROPOSED DETACHED DUAL	$\sim$	IVNCH DITH DINC	POSTAL: PO BOX 1298 Mudgee NSW 2850	F LC DRAWING TITLE:	OR PLAN - DV	ELLING IWO	
			SEPERATE SPECIFICATION DOCUMENTS     STRUCTURAL ENGINEERS DOCUMENTATION     PCA DOCUMENTS (WHERE APPLICABLE)	BUILDING DESIGNERS	OCCUPANCY LOT 5 I 4 SUTTOR AVENUE CAERLEON NSW 2850		GROUP	E. projects@lynchbuildinggroup.com.au	DESIGN: LBG DRAFTED: J.LY	FILE NO: 0444-A0	04 OF 09	В
			- BASIX CERTIFICATE - ALL RELEVANT CODES, STANDARDS & APPROVALS	ASSOCIATION OF AUSTRALIA	PROJECT:						DRAWING NO:	REV:

# DWELLING ONE

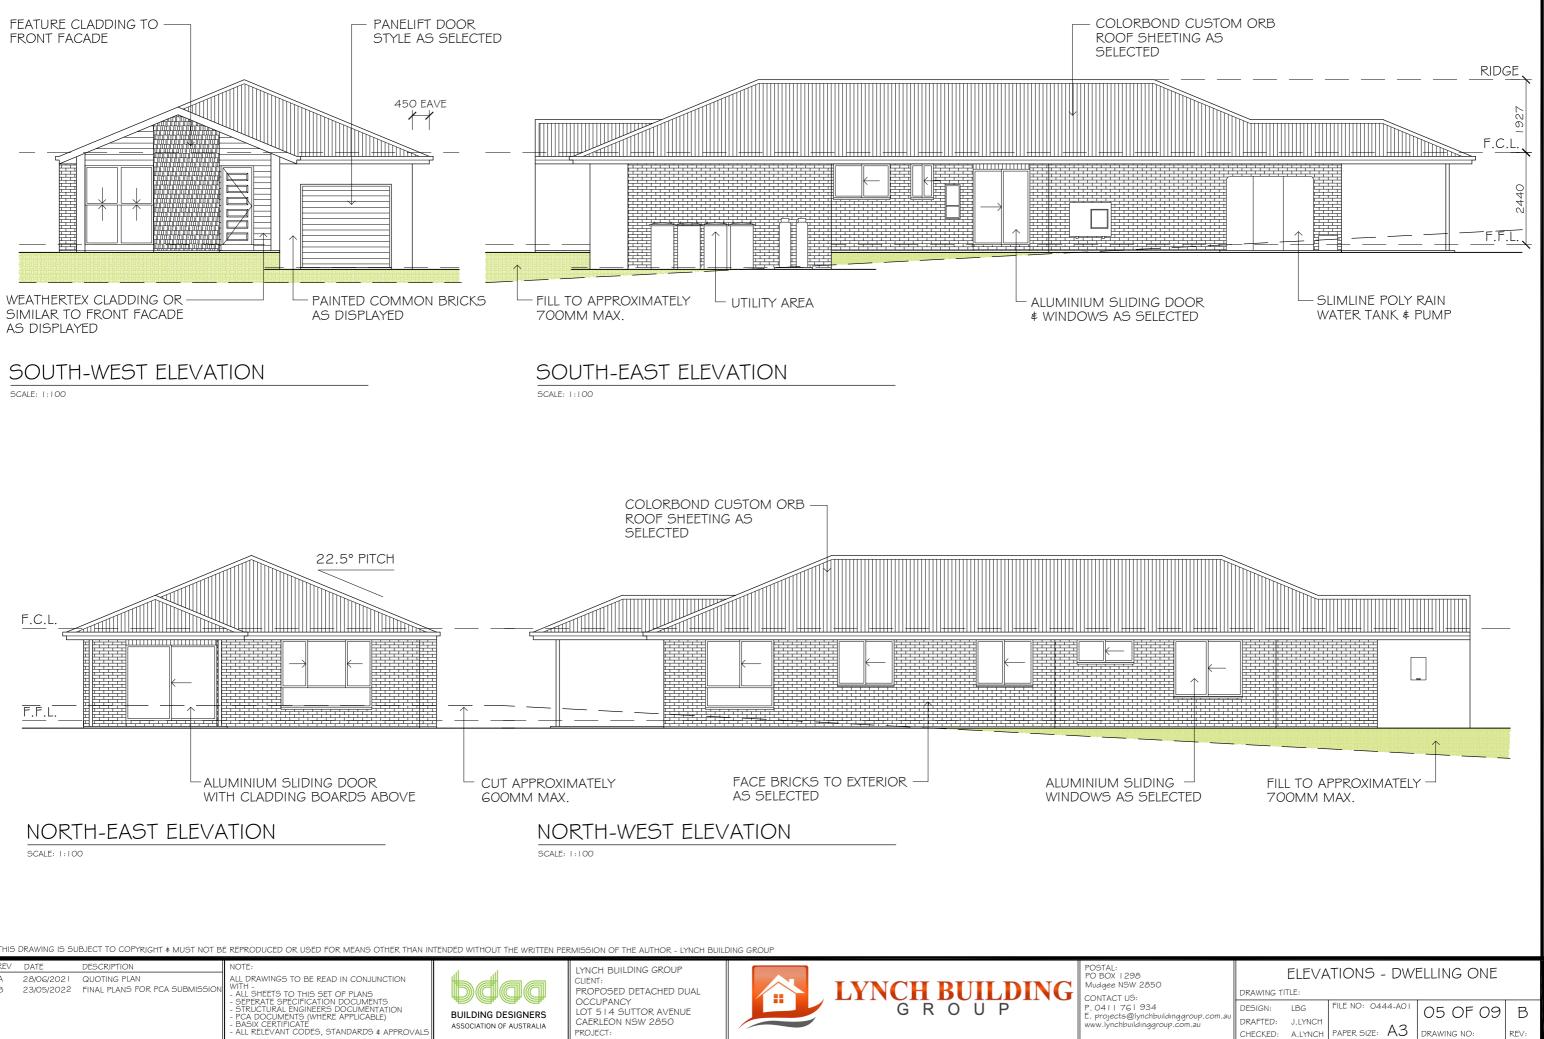

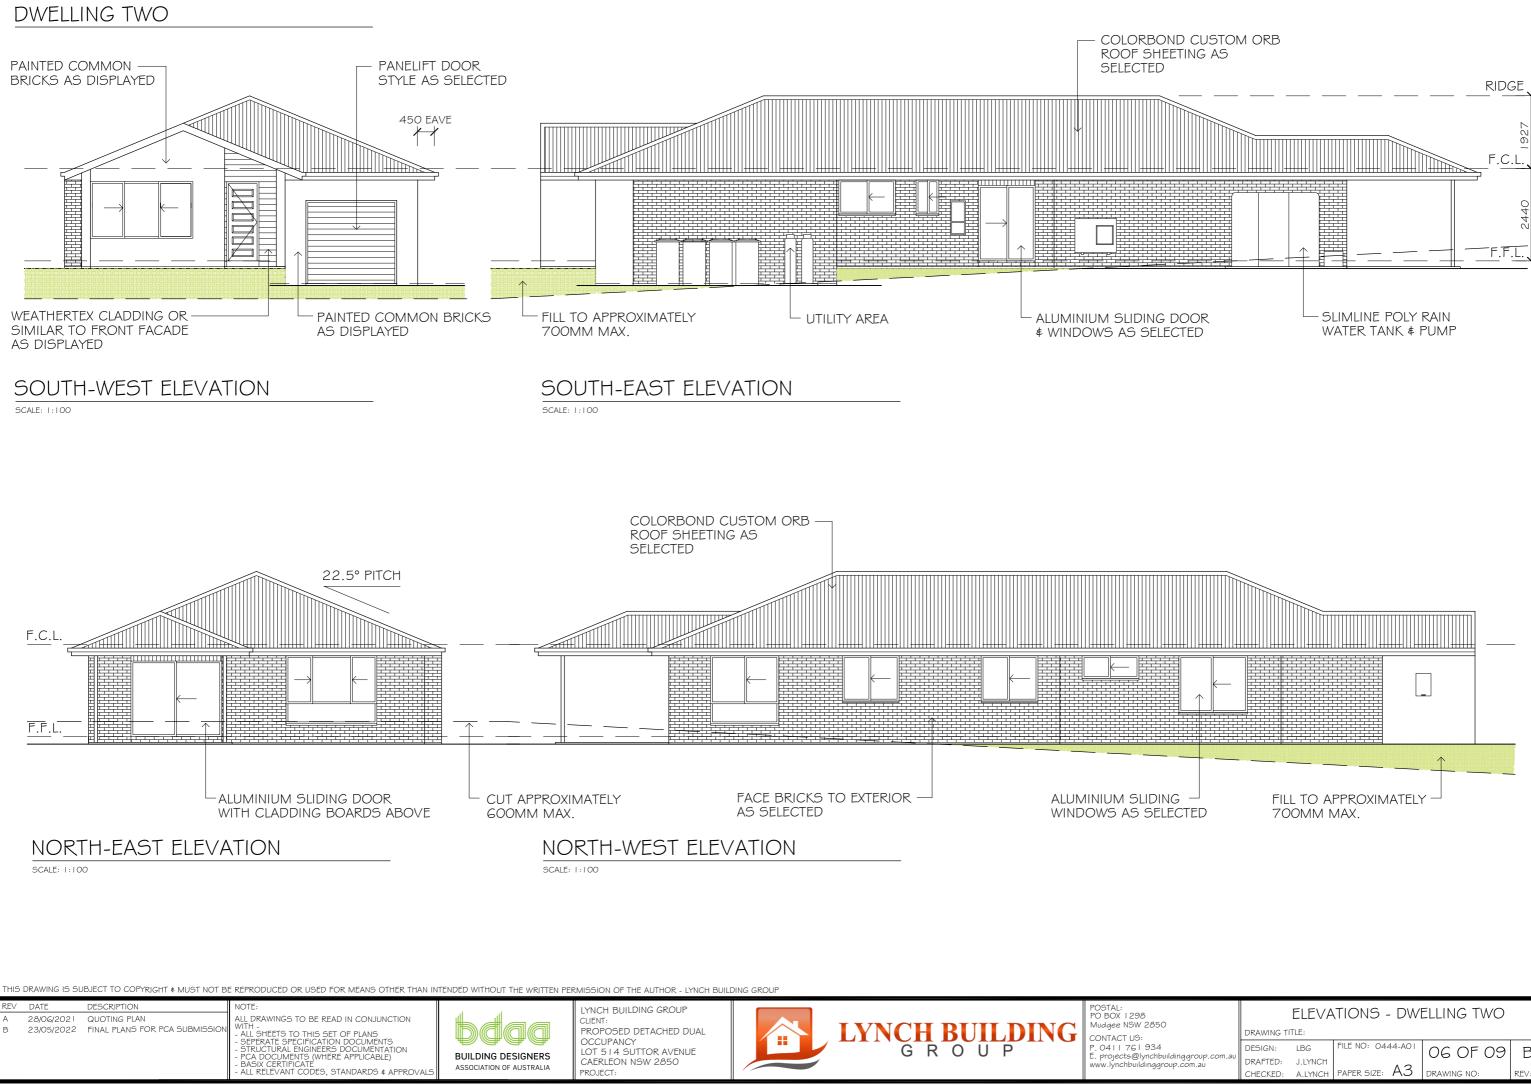

	ELEVATIONS - DWELLING TWO								
	DRAWING TI								
	DESIGN:	LBG J.LYNCH	FILE NO: 044	44-AO I	06 OF 09	В			
linggroup.com.au p.com.au	DRAFTED:	J.LYNCH							
	CHECKED:	A.LYNCH	PAPER SIZE:	A3	DRAWING NO:	REV:			

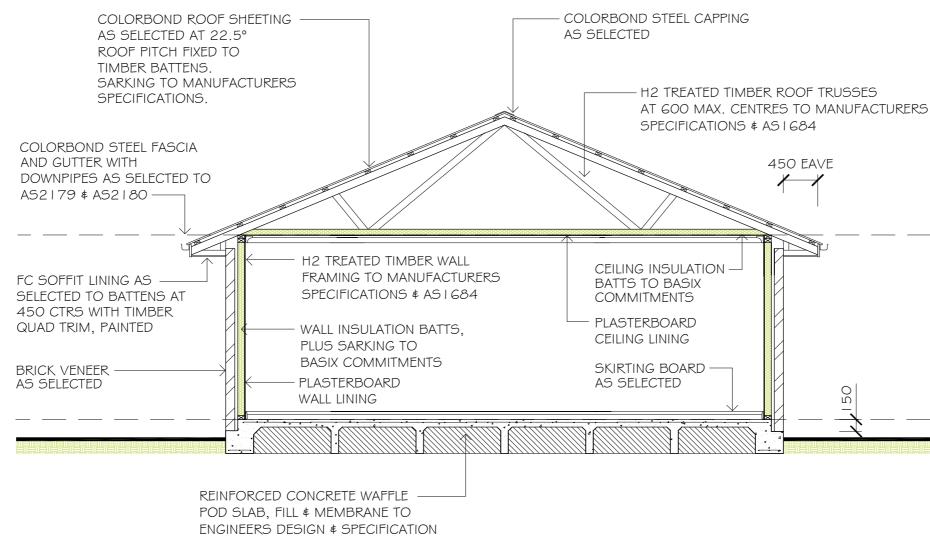

TYPICAL SECTION

### SCALE 1.50

# SECTION NOTES

- FOR COMPLETE SLAB DETAILS & DESIGN REFER TO ENGINEERS SPECIFICATIONS & DESIGNS
- 2 TERMITE TREATMENT SHALL BE INCLUDED TO PROTECT AGAINST INFESTATION TO AS3660, I-2000
- 3 PARTY WALL DETAILS -
  - SEPARATING PARTY WALL MUST NOT BE CROSSED BY TIMBER OR OTHER COMBUSTIBLE BUILDING ELEMENTS WITH THE EXCEPTION OF STEEL ROOFING BATTENS WITH DIMENSIONS 75x50MM OR ROOF SARKING, MUST ALSO BE PACKED USING FIRE RESISTANT MATERIAL IN ACCORDANCE WITH THE B.C.A. - 25MM GYPROCK SHAFT LINER PANEL BETWEEN STEEL "H" WITH 20-40MM OF SEPERATION BETWEEN FRAMES & GYPROCK SHAF LINER PANEL
  - STUDS AT 600MM MAXIMUM CENTRES
  - I OMM GYPROCK "SUPERCHEK" PLASTERBOARD WALL LINING TO FACE OF PARTY WALL (GYPROCK EWFA 45743 CSR 360 PARTY WALL SYSTEM)
- SELECT WALL FRAMING WITH R2.7 GOLD WALL INSULATION BATTS TO BE INSTALLED
- FIRE RESISTANT MINERAL FIRE BLANKET TO BE INSTALLED DIRECTLY ABOVE PARTY WALL TO UNDERSIDE OF ROOFING IN ACCORDANCE WITH THE B.C.A.

# GENERAL NOTES

- PLANS DOCUMENTED FOR THE EXCLUSIVE USE OF THE NOTED CLIENTS BELOW ONLY & SUBJECT TO COPYRIGHT LAWS.
- 2 ALL DIMENSIONS ≰ INFORMATION WITHIN THESE SET OF PLANS ARE DOCUMENTED WITH DUE CARE.
- ALL DRAWINGS WITHIN THIS SET OF PLANS SHALL BE READ IN 31 CONJUNCTION WITH OTHER CONSULTANTS DRAWINGS. DESIGNS € SPECIFICATIONS & WITH OTHER WRITTEN INSTRUCTIONS ISSUED DURING ESTIMATIONS & CONSTRUCTION WITH SELECTED BUILDER.
- ALL DISCREPANCIES SHALL BE REFERRED TO IN WRITING TO 41 JHL BUILDING DESIGNS FOR A DECISION BEFORE PROCEEDING WITH THE WORK
- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS STATED OTHERWISE. DIMENSIONS ARE TO STRUCTURAL ELEMENTS OF THE DRAWING # NOT TO FINISHED SURFACES IE. TILING, PLASTERBOARD ETC.
- 61 ALL RELEVANT DIMENSIONS ARE TO BE CONFIRMED BY THE CONTRACTOR PRIOR TO CONSTRUCTION & FABRICATION WITH REGARDS TO ONSITE & OFF SITE REQUIREMENTS & WORK

- THE RELEVANT SERVICE AUTHORITIES SHALL BE CONSULTED IN REGARDS TO CONFIRMING / CHECKING ALL DIMENSIONS, LEVELS, SERVICES & SITE CONDITIONS PRIOR TO CONSTRUCTION
- THE RELEVANT STATUTORY AUTHORITIES SHALL BE NOTIFIED \$ 8| APPROVAL SORT FROM / OBTAINED PRIOR TO CONSTRUCTION, IF & WHEN NECESSARY
- STUD WALL & TRUSSED ROOF DESIGN, BRACING & TIE DOWN TO 9| SELECTED FRAME & TRUSS MANUFACTURERS ENGINEERED SPECIFICATIONS & TO AS I 684 WHERE APPLICABLE.
- IO SHALL NO WIND CLASSIFICATION BE NOTED, CLIENT TO BE ADVISED BY PCA OR ENGINEERING CONSULTANT.
- II SITE CLASSIFICATION TO BE DETERMINED BY QUALIFIED GEOTECHNICAL ENGINEER & ALL REINFORCED CONCRETE FOOTINGS & SLABS TO BE CONSTRUCTED TO AS2870.
- ALL STORM WATER FROM ROOF TO BE DISPURSED TO REQUIRED DOWNPIPES & TO STREET / RAIN WATER TANK TO AUSTRALIAN STANDARDS & PCA REQUIREMENTS.
- 14 WHERE A SITE REQUIRES CUT & FILL TO OCCUR OR RETAIN CONSTRUCTED, ENGINEERS SHALL BE CONSULTED WHERE NECESSARY & BUILDING CONTRACTOR TO ENSURE ALL FIN GROUND LINES & GRADIENTS DIVERT ALL SURFACE STORN FROM THE PROPOSED RESIDENCE FITHER BY MEANS OF F
  - DETENTION AREAS OR GRADING TO KERB NEIGHBOURING PROPERTIES MUST BE TAKEN INTO CONSIDERATION WITH OF THE FLOW OF STORM WATER
- 15 SEWER DRAINAGE LINES TO BE CONNECTED TO SEWER MA THE CASE OF A RURAL PROPERTY, CONNECTED TO A SEPT IN ACCORDANCE WITH THE RELEVANT AUSTRALIAN STAND LOCAL PCA.
- 16 A QUALIFIED CONTRACTOR SHALL COMPLETE THE FINAL DR LAYOUT TO BE SUBMITTED TO THE LOCAL PCA FOR THEIR RECORDS & APPROVAL.

### HIS DRAWING IS SUBJECT TO COPYRIGHT & MUST NOT BE REPRODUCED OR USED FOR MEANS OTHER THAN INTENDED WITHOUT THE WRITTEN PERMISSION OF THE AUTHOR - LYNCH BUILDING GROUP DATE DESCRIPTION NOTE LYNCH BUILDING GROUP 28/06/2021 QUOTING PLANS ALL DRAWINGS TO BE READ IN CONJUNCTION CLIENT LYNCH BUILDING G R O U P 23/05/2022 FINAL PLANS FOR PCA SUBMISSIO ALL SHEETS TO THIS SET OF PLANS PROPOSED DETACHED DUAL SEPERATE SPECIFICATION DOCUMENTS STRUCTURAL ENGINEERS DOCUMENTATION PCA DOCUMENTS (WHERE APPLICABLE) OCCUPANCY LOT 514 SUTTOR AVENUE BUILDING DESIGNERS CAERLEON NSW 2850 ASSOCIATION OF AUSTRALIA ALL RELEVANT CODES, STANDARDS & APPROVALS ROIFCT

O BOX 1298 Mudgee NSW 2850 CONTACT US: . 0411 761 934 . projects@lynchbuildinggroup.com.au ww.lynchbuildinggroup.com.au



13	A MINIMUM WATER ALLOWANCE S PROPERTIES FOR FIRE FIGHTING F	17		YSTEM IS AS SPECIFIED CATION NOTED OF FLOO			
4	WHERE A SITE REQUIRES CUT & FILL TO OCCUR OR RETAINING WALLS CONSTRUCTED, ENGINEERS SHALL BE CONSULTED WHERE NECESSARY & BUILDING CONTRACTOR TO ENSURE ALL FINAL LEVELS, GROUND LINES & GRADIENTS DIVERT ALL SURFACE STORM WATER FROM THE PROPOSED RESIDENCE EITHER BY MEANS OF PIPES, DETENTION AREAS OR GRADING TO KERB. NEIGHBOURING PROPERTIES MUST BE TAKEN INTO CONSIDERATION WITH THE DESIGN OF THE FLOW OF STORM WATER. SEWER DRAINAGE LINES TO BE CONNECTED TO SEWER MAIN OR IN THE CASE OF A RURAL PROPERTY, CONNECTED TO A SEPTIC SYSTEM.			WHERE BRICK VEN JOINTS FOR ARTIC	EER CONSTRUCTION IS	ORDANCE WITH AS3660. 5 SPECIFIED, CONTROL 2 VIDED AT NOMINAL 6.0 INEERS DETAILS.	
15		, CONNECTED TO A SEPTIC SYSTEM,					
16	A QUALIFIED CONTRACTOR SHALL COMPLETE THE FINAL DRAINAGE LAYOUT TO BE SUBMITTED TO THE LOCAL PCA FOR THEIR RECORDS & APPROVAL.						
IF	BUILDING	POSTAL: PO BOX I 298 Mudgee NSW 2850 CONTACT US:	DR	AWING TITLE:	YPICAL SEC	TION	
-	O U P	P. 0411 761 934	DE	SIGN: LBG	FILE NO: 0444-A01	07 OF 09	В

PAPER SIZE: A3

07 OF 09 B

DRAWING NO:

CHECKED:

DRAFTED: J.LYNCH

A LYNCH

DWELLING ONE	•	•			•	]
	Q					
HIS DRAWING IS SUBJECT TO COPYRIGHT & MUST NOT BE REPR	RODUCED OR USED FOR MEANS OTHER THAN INT	ENDED WITHOUT THE WRITTE	N PERMISSION OF THE AUTHOR - LYNCH BUI	DING GROUP		
EV         DATE         DESCRIPTION         NOTE           28/06/2021         QUOTING PLANS         ALL E	E: DRAWINGS TO BE READ IN CONJUNCTION		LYNCH BUILDING GROUP CLIENT:			POSTAL: PO BOX 1298 Mudgee NSW 2850
25/05/2022 TINAL LANS FOR FOR SUDDINISSION	SHEETS TO THIS SET OF PLANS PERATE SPECIFICATION DOCUMENTS RUCTURAL ENGINEERS DOCUMENTATION A DOCUMENTS (WHERE APPLICABLE) SIX CERTIFICATE RELEVANT CODES, STANDARDS & APPROVALS	BUILDING DESIGNERS ASSOCIATION OF AUSTRALIA			<b>H BUILDING</b>	CONTACT US: P. 04   1 76   934 E. projects@lynchbuild www.lynchbuildinggrou

LEGEN	D				
X 300	SINGLE POWER POINT (DISTANCE ABOVE F.F.L.)	(1)			
XX 300	DOUBLE POWER POINT (DISTANCE ABOVE F.F.L.)	( 8)			
	FLUORESCENT LIGHTS - SINGLE	(1)			
0	DOWN LIGHT	(20)			
	EXTERNAL WALL LIGHT	(-)			
$\boxtimes$	SENSOR LIGHT	(1)			
$\otimes$	STANDARD BATTEN	(7)			
83	TASTIC LIGHT - 4 LIGHT	(1)			
8	TASTIC LIGHT - 2 LIGHT	(1			
TV	TELEVISION OUTLET	(2)			
NBN	NBN LOCATION	(1)			
-	2-WAY SWITCH	(-)			
ρ	PENDANT LIGHT	(-)			
OXX	EXTERNAL DOUBLE POWER POINT	(2)			
×	CEILING FAN - WITH LIGHT	(-)			
ELECTRICAL NOTES					
<ol> <li>ALL ELECTRICAL WORK SHALL BE CARRIED OUT BY A LICENSED CONTRACTOR. ALL WORK SHALL BE IN ACCORDANCE WITH AS/NZ3012 \$ ALL LINENSING REQUIREMENTS.</li> </ol>					
	2 THE SELECTION OF FITTINGS AND THE LAYOUT TO BE CARRIED OUT BY THE BUILDER ¢ DESIGNED TO THE CLIENT'S REQUIREMENTS.				

3 ALL APPROVED SMOKE ALARMS / DETECTORS TO BE INSTALLED TO AS3786 BY A LICENSED CONTRACTOR.

# LEGEND OUTDOOR AIR CONDITIONER UNIT $\searrow$ ZONES SUPPLY AIR GRILLS RETURN AIR GRILLS AIR CONDITIONER UNIT IN ROOF SPACE 1944 - A. AIR CONDITIONER CONTROL PANEL INDOOR WALL MOUNTED SPLIT SYSTEM

### MECHANICAL NOTES I ALL MECHANICAL WORKS REGARDING AIR CONDITIONING SHALL BE CARRIED OUT BY A LICENSED CONTRACTOR. ALL WORK SHALL BE IN ACCORDANCE WITH AS STANDARDS & ALL LINENSING REQUIREMENTS 2 THE SELECTION OF FITTINGS AND THE LAYOUT TO BE CONFIRMED BY THE BUILDER & DESIGNED TO THE CLIENT'S REQUIREMENTS. 3 GENERAL LAYOUT OF SUPPLY AIR GRILLS ETC IS TO BE VIEWED AS AN EXAMPLE ONLY & CAN CHANGE THROUGHOUT INSTALLATION ELECTRICAL & MECHANICAL PLANS - DWELLING ONE DRAWING TITLE: FILE NO: 0444-A01 DESIGN: LBG 08 OF 09 B E. projects@lynchbuildinggroup.com.au www.lynchbuildinggroup.com.au DRAFTED: J.LYNCH CHECKED: A.LYNCH PAPER SIZE: A3 DRAWING NO: REV:

DWELLIN	NG TWO	•	•		• •	
			0			
			$\bigotimes$			

THIS DRAWING IS SUBJECT TO COPYRIGHT & MUST NOT BE REPRODUCED OR USED FOR MEANS OTHER THAN INTENDED WITHOUT THE WRITTEN PERMISSION OF THE AUTHOR - LYNCH BUILDING GROUP

REV	DATE	DESCRIPTION	NOTE:
A B	28/06/2021 23/05/2022	QUOTING PLANS FINAL PLANS FOR PCA SUBMISSION	ALL DRAWINGS TO WITH - - ALL SHEETS TO TH - SEPERATE SPECIF - STRUCTURAL ENG
			- PCA DOCUMENTS





LYNCH BUILDING GROUP CLIENT: PROPOSED DETACHED DUAL OCCUPANCY LOT 5 14 SUTTOR AVENUE CAERLEON NSW 2850





LEGEN	ID				
X 300	SINGLE POWER POINT (DISTANCE ABOVE F.F.L.)	(1)			
XX 300	DOUBLE POWER POINT (DISTANCE ABOVE F.F.L.)	( 8)			
	FLUORESCENT LIGHTS - SINGLE	(1)			
0	DOWN LIGHT	(20)			
	EXTERNAL WALL LIGHT	(-)			
$\boxtimes$	SENSOR LIGHT	(1)			
$\otimes$	STANDARD BATTEN	(7)			
83	TASTIC LIGHT - 4 LIGHT	(1)			
8	TASTIC LIGHT - 2 LIGHT	(1)			
TV	TELEVISION OUTLET	(2)			
PH	TELEPHONE	(1)			
-	2-WAY SWITCH	(-)			
ρ	PENDANT LIGHT	(-)			
OXX	EXTERNAL DOUBLE POWER POINT	(2)			
X	CEILING FAN - WITH LIGHT	(-)			
ELECTRICAL NOTES					
<ol> <li>ALL ELECTRICAL WORK SHALL BE CARRIED OUT BY A LICENSED CONTRACTOR. ALL WORK SHALL BE IN ACCORDANCE WITH AS/NZ3012 &amp; ALL LINENSING REQUIREMENTS.</li> </ol>					
	THE SELECTION OF FITTINGS AND THE LAYOUT TO BE CARRIED OUT BY THE BUILDER ¢ DESIGNED TO THE CLIENT'S REQUIREMENTS.				

3 ALL APPROVED SMOKE ALARMS / DETECTORS TO BE INSTALLED TO AS3786 BY A LICENSED CONTRACTOR.

# LEGEND OUTDOOR AIR CONDITIONER UNIT ZONES SUPPLY AIR GRILLS RETURN AIR GRILLS AIR CONDITIONER UNIT IN ROOF SPACE AIR CONDITIONER CONTROL PANEL

INDOOR WALL MOUNTED SPLIT SYSTEM

# MECHANICAL NOTES

- ALL MECHANICAL WORKS REGARDING AIR CONDITIONING SHALL BE CARRIED OUT BY A LICENSED CONTRACTOR. ALL WORK SHALL BE IN ACCORDANCE WITH AS STANDARDS & ALL LINENSING REQUIREMENTS.
   THE SELECTION OF FITTINGS AND THE LAYOUT TO BE CONFIRMED BY THE BUILDER & DESIGNED TO THE CLIENT'S REQUIREMENTS.
- 3 GENERAL LAYOUT OF SUPPLY AIR GRILLS ETC IS TO BE VIEWED AS AN EXAMPLE ONLY & CAN CHANGE THROUGHOUT INSTALLATION

	ELECTRICAL & MECHANICAL PLANS - DWELLING TWO							
	DRAWING TITLE:							
ıggroup.com.au com.au	DESIGN:	LBG	FILE NO: 0444-AC	09 OF 09	В			
	DRAFTED:	J. LYNCH						
	CHECKED:	A.LYNCH	PAPER SIZE: A3	DRAWING NO:	REV:			