



SEDIMENT CONTROL

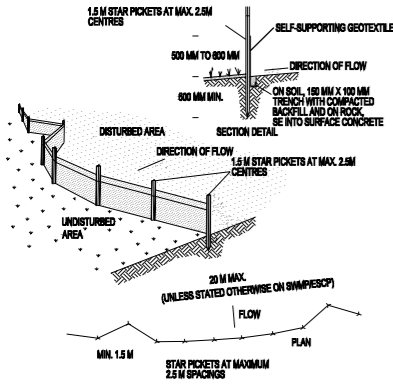

- CONSTRUCTION NOTES**
- CONSTRUCT SEDIMENT FENCES AS CLOSE AS POSSIBLE TO BEING PARALLEL TO THE CONTOURS OF THE SITE, BUT WITH SMALL RETURNS AS SHOWN IN THE DRAWING TO LIMIT THE CATCHMENT AREA OF ANY ONE SECTION. THE CATCHMENT AREA SHOULD BE SMALL ENOUGH TO LIMIT WATER FLOW IF CONCENTRATED AT ONE POINT TO 50 LITRES PER SECOND IN THE DESIGN STORM EVENT, USUALLY THE 10-YEAR EVENT.
 - CUT A 150-MM DEEP TRENCH ALONG THE UPSLOPE LINE OF THE FENCE FOR THE BOTTOM OF THE FABRIC TO BE ENTRENCHED.
 - DRIVE 1.5 METRE LONG STAR PICKETS INTO GROUND AT 2.5 METRE INTERVALS (MAX) AT THE DOWNSLOPE EDGE OF THE TRENCH. ENSURE ANY STAR PICKETS ARE FITTED WITH SAFETY CAPS.
 - FIX SELF-SUPPORTING GEOTEXTILE TO THE UPSLOPE SIDE OF THE POSTS ENSURING IT GOES TO THE BASE OF THE TRENCH. FIX THE GEOTEXTILE WITH WIRE TIES OR AS RECOMMENDED BY THE MANUFACTURER. ONLY USE GEOTEXTILE SPECIFICALLY PRODUCED FOR SEDIMENT FENCING. THE USE OF SHADE CLOTH FOR THIS PURPOSE IS NOT SATISFACTORY.
 - JOIN SECTIONS OF FABRIC AT A SUPPORT POST WITH A 150-MM OVERLAP.
 - BACKFILL THE TRENCH OVER THE BASE OF THE FABRIC AND COMPACT IT THOROUGHLY OVER THE GEOTEXTILE.

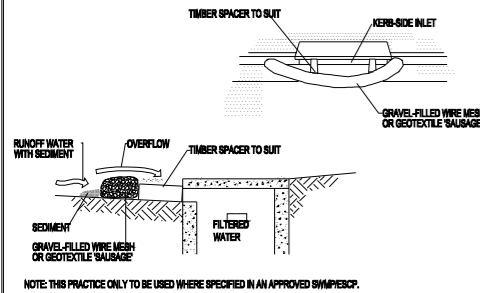

- CONSTRUCTION NOTES**
- INSTALL FILTERS TO KERB INLETS ONLY AT SAG POINTS.
 - FABRICATE A SLEEVE MADE FROM GEOTEXTILE OR WIRE MESH LONGER THAN THE LENGTH OF THE INLET PIT AND FILL IT WITH 25 MM TO 50 MM GRAVEL.
 - FORM AN ELLIPTICAL CROSS-SECTION ABOUT 150 MM HIGH X 400 MM WIDE.
 - PLACE THE FILTER AT THE OPENING LEAVING AT LEAST A 100-MM SPACE BETWEEN IT AND THE KERB INLET. MAINTAIN THE OPENING WITH SPACER BLOCKS.
 - FORM A SEAL WITH THE KERB TO PREVENT SEDIMENT BYPASSING THE FILTER.
 - SANDBAGS FILLED WITH GRAVEL CAN SUBSTITUTE FOR THE MESH OR GEOTEXTILE PROVIDING THEY ARE PLACED SO THAT THEY FIRMLY ABUT EACH OTHER AND SEDIMENT-LADEN WATERS CANNOT PASS BETWEEN.

SITE NOTES

- CONFIRM ALL DIMENSIONS ON SITE TO EXISTING RESIDENCE PRIOR TO COMMENCEMENT OF ANY WORK.
- THIS PLAN DOES NOT PROVIDE SPECIFIC LANDSCAPE PLANTING LOCATIONS.
- THE EXACT LOCATION OF UNDERGROUND AND ABOVEGROUND SERVICES SHALL BE PROVEN ON SITE. NO GUARANTEE IS GIVEN THAT ALL EXISTING SERVICES ARE SHOWN.
- THIS DRAWING SET TO BE READ IN CONJUNCTION WITH THE SPECIFICATION PROVIDED.
- BEWARE OF EXISTING SERVICES. CONFIRM LOCATIONS PRIOR TO EXCAVATION. TAKE EXTREME CARE.

LEGEND


- TEMPORARY SITE MATERIAL DISPOSAL ARE DURING CONSTRUCTION. TO BE PROTECTED BY A SEDIMENT FENCE OR STRAW BALE FILTER.
- SITE ACCESS DURING CONSTRUCTION.
- COMPLYING DEVELOPMENT BOUNDARY MIN. OFFSET

THIS DRAWING IS SUBJECT TO COPYRIGHT & MUST NOT BE REPRODUCED OR USED FOR MEANS OTHER THAN INTENDED WITHOUT THE WRITTEN PERMISSION OF THE AUTHOR - LYNCH BUILDING GROUP



LOCATION PLAN

SCALE: 1:NTS

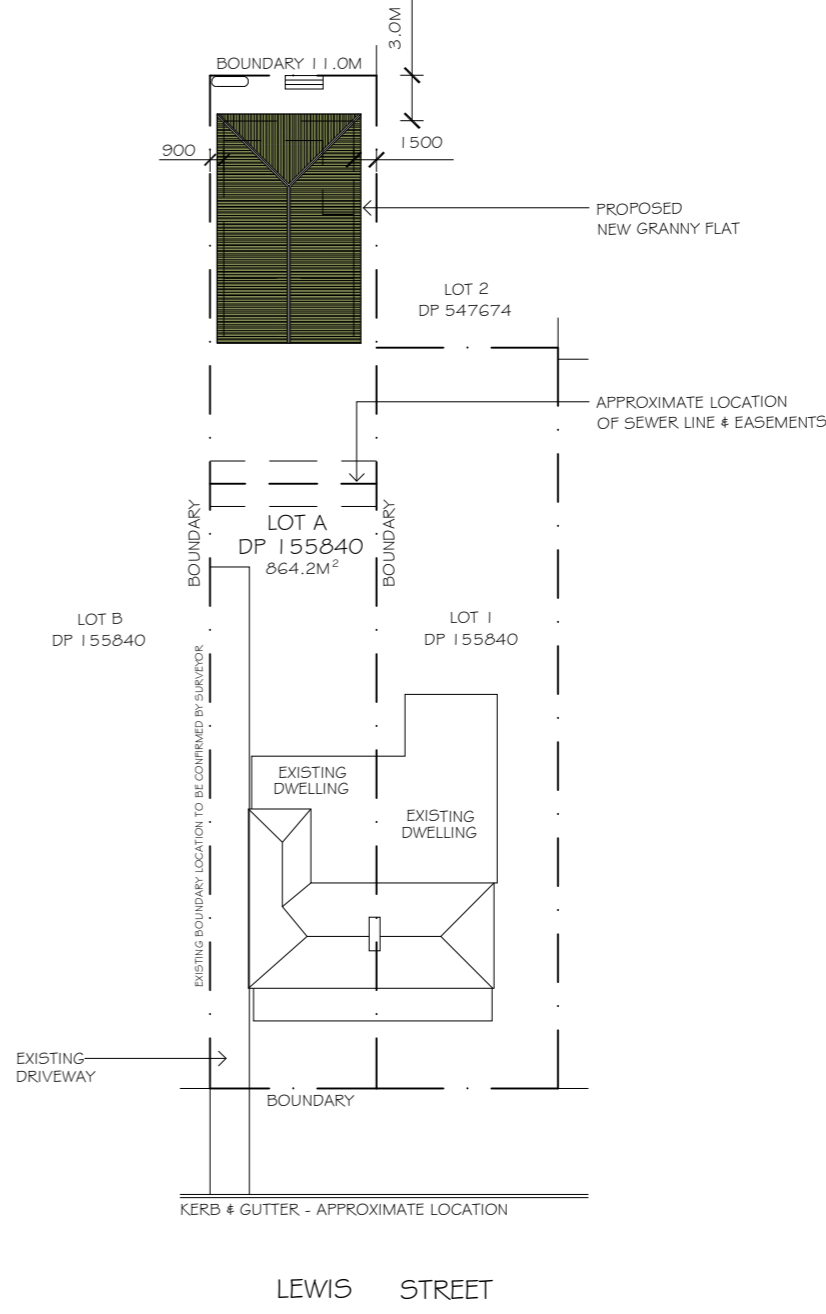

SITE PLAN

SCALE: 1:500

DS
[Signature]

REV	DATE	DESCRIPTION
A	22/02/2023	PRELIMINARY FOR QUOTING
B	12/04/2023	FURTHER DETAILS ADDED
C	27/07/2023	FINAL PLANS FOR PCA SUBMISSION

NOTE:
ALL DRAWINGS TO BE READ IN CONJUNCTION WITH -
- ALL SHEETS TO THIS SET OF PLANS
- SEPERATE SPECIFICATION DOCUMENTS
- STRUCTURAL ENGINEERS DOCUMENTATION
- PCA DOCUMENTS (WHERE APPLICABLE)
- BASIX CERTIFICATE
- ALL RELEVANT CODES, STANDARDS & APPROVALS



LYNCH BUILDING GROUP
DUNN & BEDINGFIELD PROJECT
CLIENT:
PROPOSED NEW GRANNY FLAT
LOT A, 38 LEWIS STREET
MUDGEES NSW 2850
PROJECT:



LYNCH BUILDING GROUP

POSTAL:
PO BOX 1298
Mudgee NSW 2850
CONTACT US:
P. 0411 761 934
E. projects@lynchbuildinggroup.com.au
www.lynchbuildinggroup.com.au

SITE & LOCATION PLAN			
DRAWING TITLE:			
DESIGN:	L.B.G	FILE NO:	0486-A01
DRAFTED:	J.LYNCH	02 OF 06	C
CHECKED:	A.LYNCH	PAPER SIZE:	A3
DRAWING NO:		REV:	